

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 August 2004 (19.08.2004)

PCT

(10) International Publication Number
WO 2004/070871 A1

(51) International Patent Classification⁷: **H01Q 1/24**,
09/04, 1/38, H04B 1/38, H04M 1/02

(21) International Application Number:
PCT/EP2004/001003

(22) International Filing Date: 4 February 2004 (04.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03445020.5 10 February 2003 (10.02.2003) EP
60/449,701 24 February 2003 (24.02.2003) US

(71) Applicant (for all designated States except US): SONY
ERICSSON MOBILE COMMUNICATIONS AB
[SE/SE]; S-221 88 Lund (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WEDEL, Martin
[SE/SE]; Katrinelundsgatan 4b, S-212 16 Malmö (SE).
ANTON, Georgeta [SE/SE]; Blekingborgsgatan 3b, S-
214 63 Malmö (SE).

(74) Agents: LINDBERG, Olle et al.; Albihts Malmö Ab, P.O.
Box 4289, S-203 14 Malmö (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii)) for all designations
- as to the applicant's entitlement to claim the priority of the
earlier application (Rule 4.17(iii)) for all designations
- as to the applicant's entitlement to claim the priority of the
earlier application (Rule 4.17(iii)) for all designations
- of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: COMBINED SPEAKER AND ANTENNA COMPONENT

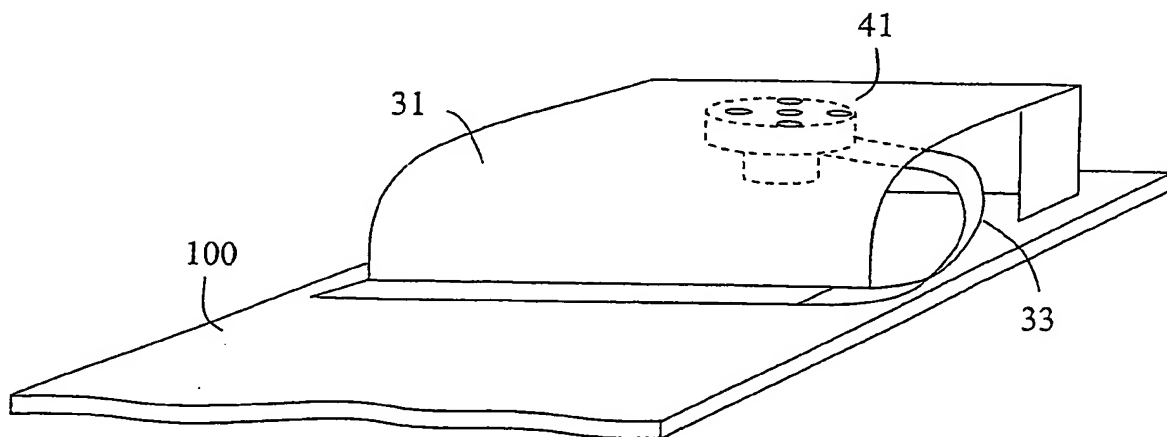

(57) Abstract: A combined speaker and antenna arrangement for a communication terminal, comprising a support structure (100) carrying a first antenna element (101), and a second antenna element (31) arranged at a predetermined distance from said first antenna element. Said second antenna element is a conductive first portion (31) of a sheet of flexible film, and an elongated second portion (32) of said flexible film, carrying a conductive lead, extends from adjacent to said first portion to a speaker (41) connected to an outer end of said elongated second portion. The second, elongated, portion is bent such that said speaker is positioned between said film and said support structure, adjacent to an aperture in said first portion.

JC20 Rec'd PCT/PTO 02 AUG 2005

COMBINED SPEAKER AND ANTENNA COMPONENT

Field of the invention

The present invention relates generally to a communication terminal
5 comprising an antenna for wireless communication purposes, and a speaker for
conveying audio information to a user of the communication terminal. More
specifically the invention relates to a communication terminal including a
component which integrates said speaker and an antenna element, and to said
component as such.

10

Background

The mobile phone industry has had an enormous development both regarding
quality of service and transmission capabilities, as well as the technology for
producing advanced communications terminals. In only a couple of decades the
15 communication systems have gone from analogue to digital, and at the same time
the dimensions of the communication terminals have gone from briefcase size to the
pocket size phones of today. Still today, mobile phones are getting smaller and
smaller and the size is generally considered to be an important factor for the end
customer. The development in electronics has made it possible to miniaturise the
20 components of the terminals, at the same time making the terminals capable of
performing more advanced functions and services. The development of new
transmission schemes, the so-called 3rd generation mobile system standing at the
door and the 4th generation to be expected maybe ten years later, also provides the
possibility to convey more advanced data to the wireless communication terminals,
25 such as real time video.

In order to benefit from the capabilities of the transmission system, the future
generation of phones will have a large display in order to perform multimedia input
and output, and the picture quality will be of high importance. Still, the keypad or
keyboard must be large enough to allow people to press one key at a time.

30 Figure 1 discloses a typical example of a state of the art mobile phone 1,
carried by a housing or chassis 2. The size of a keypad 4 and a display 3 basically

sets the limit of how small the terminal 1 can be. However, to be able to work as a standard phone for voice interaction, the terminal 1 also includes a microphone 5 and a speaker 6, preferably arranged at opposite ends of the terminal 1. Figure 2 discloses a different embodiment of a state of the art communication terminal 1, wherein the display 3 occupies a larger portion of the front side of the terminal. Several of the functions of the keypad 4 have been included in a graphical user interface applicable to the display 3, rendering a data input interface having less keys. Those keys 4 may also be moved to the side of the communication terminal in order to allow for the display 3 to occupy a larger portion of the front side of terminal 1. A specific tool 8 may be provided for inputting data on a touch-sensitive screen of the display 3. Figs 1 and 3 show two typical examples of state of the art communication terminals 1, whereas the skilled persons will realise that combinations of the two are also well known as well as other designs, such as a so called clamshell type terminal.

15 In the state of the art communication terminal a terminal output 7 is mounted on the front of the terminal above the display with the speaker 6 immediately behind the output 7, as shown in Figs 1 and 2. This means that even with a smallest available speaker used today, with a diameter of about 13 mm, the terminal would be approximately this much longer in its longitudinal extension than what would have been the case if only the display 3 and/or keypad 4 had defined the length of 20 the terminal 1. The antenna of the terminal is generally located at the upper portion of the terminal, and a lower portion of the terminal being occupied by a battery. Placing the speaker 6 behind the display 3 would therefore increase the thickness of the terminal 1 since it would have to compete with the antenna for the relevant 25 space.

The performance of the speaker is to a high extent dependent on the back volume, i.e. the acoustic resonance cavity behind the speaker. As mentioned above, almost every phone today has the speaker position in the upper parts of the front of the terminal above the display and keyboard. However, also the antenna is 30 preferably placed at the upper portion of the terminal. Today, built in antennas are primarily used, such as e.g. PIFAs, Planar Inverted-F Antenna, or micro strip

antennas. Such designs also require a certain space or distance between an active antenna element and a ground plane, in order to provide sufficient bandwidth.

Consequently, placing the speaker and the antenna one over the other, in a longitudinal direction of the terminal, will add to the length of the terminal. On the other hand, placing the antenna behind the speaker will add to the thickness of the terminal. Therefore, both the antenna design and the speaker design, and their relative position, will affect the dimensions of the terminal.

A solution to this problem of miniaturisation of communication terminals is proposed in WO 00/38475, in which the acoustic resonance chamber of the speaker is completely or partly located in the electromagnetic resonance chamber of the antenna. The use of a single resonance chamber instead of two separate ones makes it possible to manufacture smaller communication devices. According to the proposed solutions the speaker is placed outside the resonance chamber, the backside of the speaker being connected to the resonance chamber by at least one acoustic channel. However, the speaker and the common chamber will still both add to the thickness of the terminal.

Summary of the invention

It is an object of the present invention to provide a novel speaker arrangement for a communication terminal, meeting the general market demand for small size and light weight terminals.

Furthermore, an aspect of this object is to provide such a speaker arrangement, which can be produced in a reliable and cost-effective manufacturing process.

Yet another aspect of this object is to provide such a speaker arrangement integrated with an antenna element of the terminal, in a way that does not impede antenna performance.

According to a first aspect of the present invention, this object is fulfilled by an integrated speaker and antenna element carrier for a communication terminal, comprising a sheet of a flexible film having a conductive first portion forming an antenna element, and an elongated second portion carrying a conductive lead

extending from adjacent to said first portion to a speaker connection pad at an outer end of said elongated second portion.

Preferably, said second portion carries a pair of conductive leads from adjacent said first portion to respective speaker connection pads.

5 Advantageously, said second portion carries at least one conductive lead which is electrically insulated from said first portion.

In one embodiment, said first conductive portion and said lead are shaped by material removal from a conductive layer on the film, and preferably by etching of said conductive layer.

10 In a preferred embodiment, said second portion is devised to carry a speaker connected to said speaker connection pad, wherein said second elongated portion is bendable such that said speaker is positioned at an aperture in said first portion.

In one embodiment, said conductive lead extends from a connection pad arranged adjacent to said first portion at a straight edge of said flexible film.

15 In a specific embodiment, said conductive first portion is a ground plane of an antenna for a radio communication terminal. Alternatively, said conductive first portion is a an antenna element of an antenna for a radio communication terminal, and has a pattern adapted to provide resonance at predetermined radio frequencies.

According to a second aspect of the present invention, the stated object is
20 fulfilled by a combined speaker and antenna arrangement for a communication terminal, comprising a support structure carrying a first antenna element, and a second antenna element arranged at a predetermined distance from said first antenna element, wherein said second antenna element is a conductive first portion of a sheet of flexible film, wherein an elongated second portion of said flexible film,
25 carrying a conductive lead, extends from adjacent to said first portion to a speaker connected to an outer end of said elongated second portion.

Preferably, said second elongated portion is bent such that said speaker is positioned between said film and said support structure, adjacent to an aperture in said first portion.

30 In one embodiment, said flexible film is attached to said support structure such that said conductive first portion is electrically connected to a ground plane of

said support structure, and preferably said flexible film is attached, at a side edge thereof, to said support structure, at which side edge a connector pad to said conductive lead is arranged. In a more specific embodiment, said connector pad is connected, at said second side edge, to speaker control circuitry arranged on said support structure.

In one embodiment, said flexible film is bar soldered at a straight edge to said support structure, at which straight said conductive first portion is electrically connected to a ground plane of said support structure, and a connector pad to said conductive lead is connected to speaker control circuitry arranged on said support structure.

In one embodiment, of the combined speaker and antenna arrangement, an insulating spacer is arranged intermediate said support structure and said flexible film, defining said predetermined distance between said first and second antenna elements.

Said spacer preferably comprises speaker attachment means, devised to secure said speaker adjacent to said aperture.

In one embodiment, said flexible film is attached to said spacer with an adhesive.

In one embodiment, said spacer is attached to said support structure by cooperating engagement members. In a more specific embodiment, said spacer has a protruding member engaging with a recess in said support structure.

Preferably, said support structure is a printed circuit board of a radio communication terminal.

According to a third aspect of the present invention, the stated object is fulfilled by a radio communication terminal, comprising a combined speaker and antenna arrangement as recited above.

According to a fourth aspect of the present invention, the stated object is fulfilled by a method for producing an integrated speaker and antenna element carrier for a communication terminal, comprising the steps of:

- providing a flexible film of an insulating material;
- coating said film with a conductive material;

- removing selected portions of the conductive material from the film, to define a first conductive surface portion, and a lead, insulated from said first portion and extending away from adjacent to said first portion; and
- cutting the film such that an elongated second portion thereof, carrying said lead, is shaped.

Preferably, said removing of selected portions of the conductive material including the step of etching.

- Furthermore, said step of removing of selected portions of the conductive material, preferably comprises the defining of a pair of separate leads, insulated from said first portion and extending away from adjacent to said first portion.

Brief description of the drawings

- Further features and advantages of the present invention will become more apparent from the following description of preferred embodiments, with reference to the accompanying drawings, on which

Fig 1 schematically shows a typical communication terminal design of a first type;

Fig. 2 schematically illustrates a typical communication terminal design of a second type;

- Fig. 3 illustrates an integrated speaker and antenna element carrier according to an embodiment of the present invention;

Fig. 4 illustrates a speaker for use with a carrier according to Fig. 3;

Fig. 5 illustrates an integrated speaker and antenna element carrier according to Fig. 3 with a speaker attached;

- Fig. 6 illustrates a spacer member devised for assembly with a device as shown in Fig. 3, according to an embodiment of the invention;

Figs 7 to 9 illustrate assembly of the integrated speaker and antenna element of Fig. 5 with the spacer member of Fig. 6, in accordance with an embodiment of the invention;

- Figs 10 to 11 illustrates how an assembled device as shown in Fig. 9 is mounted to a carrier, such as a printed circuit board PCB, in accordance with an

embodiment of the invention; and

Fig. 12 illustrates an elevated view of the assembled and mounted device of Fig. 11, in accordance with an embodiment of the invention.

5 Detailed description of preferred embodiments

The present description refers to communications terminals as a device in which to implement the speaker configuration according to the present invention. The communication terminal includes all mobile equipment devised for radio communication with a radio station, which radio station also may be a mobile
10 terminal or e.g. a stationary base station. Consequently, the term "communication terminal" includes mobile phones, pagers, communicators, electronic organisers, smart phones, PDA:s (Personal Digit Assistants), vehicle-mounted radio communication devices or the like, as well as portable laptop computers devised for wireless communication in for instance WLAN (Wireless Local Area Network).
15 Furthermore, since the design and present invention is suitable for but not restricted to mobile use, the term "communication terminal" should also be understood as to include any stationary device arranged for radio communication, such as for instance desk top computers, printers, fax machines and so on, devised to operate with radio communication with each other or some other radio station. Hence,
20 although the structure and characteristics of the combined antenna and speaker design according to the invention is mainly described herein, by way of example, in the implementation in a mobile phone, this is not to be interpreted as excluding the implementation of the inventive design in other types of radio terminals, such as those listed above. Furthermore, it should be emphasised that the term "comprising"
25 or "comprises" when used in this description and in the appended claims to indicate included features, elements or steps, is in no way to be interpreted as excluding the presence of other features, elements or steps than those expressed or stated.

Fig. 3 illustrates a basic device according to the invention, constituting a combined antenna element and speaker carrier. A sheet of flexible film in an
30 electrically non-conductive material is provided. The material is preferably some form of polymer, e.g. a polyimide such as Kapton®. The film has a first portion 31

which preferably represents a major portion of the surface of the film. In the illustrated exemplary embodiment, first portion 31 is rectangular, but it may have alternative shapes dependent on the particular application. First portion 31 has a coating or layer of electrically conductive material, such as copper, and first portion 5 31 represents an antenna element 31 for a radio antenna. In a preferred embodiment, first portion 31 is a single and continuous conductive area, usable as a ground plane for a radio antenna. Alternatively, the first portion 31 may be an active antenna element with a (not shown) structure defining resonance for suitable radio frequencies. This will be further described below.

10 An aperture, or set of apertures, 32 is provided in said first portion 31. This aperture 32 represents an audio or sound transfer opening in the flexible film, for the purpose of conveying sound waves from a speaker through the film.

A second, elongated, portion 33 of the film extends from a side of first portion 31. Second portion 32 has a substantially non-conductive surface. However, 15 at least a first lead 34 is formed on the second portion 33, extending from a proximal connection pad 36, located on the film close to first portion 31, but electrically insulated from the first portion 31. Said first lead extends from said proximal connection pad 36, along the extension of the second portion 33, to a distal connection pad 38 located at an outer end 40 of the second portion 33.

20 Preferably, second portion 33 carries two separate leads 34,35 from proximal connection pads 36,37 to distal connection pads 38,39 at said outer end of the elongated second portion 33. Preferably both are insulated from the first portion 31, though in one embodiment one of the leads is connected to the first portion.

In a preferred embodiment, a device according to the invention, and as 25 illustrated in Fig. 3, is manufactured by a coating, etching and cutting procedure. A flexible film of an insulating material is provided. The film is coated, e.g. by means of a suitable well known procedure, with a conductive material such as copper. The coating may be performed with a mask applied to the film or coating device, such that the coating material is only applied at desired locations. However, in a 30 preferred embodiment the coat is applied over the entire flexible film sheet. Subsequently, selected portions of the conductive material are removed from the

film, to define the first conductive surface portion 31, and one or more leads 34, 35 and their connection pads. This step is preferably exercised by etching the conductive material using a suitable dry or wet etching method and a mask defining the desired pattern. Finally, the film is cut such that the elongated second portion
5 carrying the leads, and the aperture 32, are shaped. Needless to say, plural structures like the one illustrated in Fig. 3 may be shaped by coating and etching on a single piece of flexible film, wherein said plural structures are separated in the subsequent cutting step.

Fig. 4 illustrates a speaker 41 suitable for use with a device according to Fig. 3. In accordance with the invention, the lead 34 on the second portion 33 of the film is preferably used as a speaker signal lead. Consequently, the outer end 40 of second portion 33 is adapted for connection of a speaker, such as speaker 41. Fig. 4 illustrates a back side of speaker 41, and connectors 42, 43 which are connectable to speaker signal leads, preferably by soldering or thermo-compression.

15 Fig. 5 illustrates the device according to Fig. 3 when connected to speaker 41 of Fig. 4. Distal connection pad 38, which constitutes a speaker connection pad 38, is connected to speaker connector 42, whereas distal connection pad 39, which constitutes a speaker connection pad 39, is connected to speaker connector 43. The speaker 41 may also be mechanically fixed to outer end 40, e.g. by clamping on the
20 outer end 40 of the film. Fig. 5 illustrates a combined speaker and antenna element 50, representing a single component with two distinctly different technical features. As will be described below, the combined device according to Fig. 5 provides a structure with several advantages, as will become clear. The following description defines the use of the present invention in a radio communication terminal, and
25 particularly on the application of the present invention in a mobile phone. However, as previously outlined, the present invention is not restricted to this field, which is to be regarded as a suitable application.

Fig. 6 illustrates an embodiment of a spacer element 61, adapted for use with the combined speaker and antenna element according to the invention. In a low
30 profile, built in, radio antenna for mobile communication, such as a PIFA, the antenna comprises a substantially planar active antenna element and a ground plane.

Preferably, the active antenna element and the ground plane are arranged at a certain distance from each other, in order to provide a suitable bandwidth for the antenna at predetermined frequencies. The spacer 61 is made of a non-conductive material, such as some form of plastics. It has an upper surface 62 to which the flexible film is attachable, and in which upper surface a recess 63 is made for housing the speaker 41. In the illustrated embodiment, the upper surface 62 is curved such that a downwards projecting wall 64 is defined. As will be clear, the curved shape provides a suitable interface to the flexible film. The spacer further has spacing walls 65 projecting downwards from the upper surface 62. At the opposite side of upper surface 62, lower edges of spacing walls 65 define, together with the lower edge of wall 64, a lower plane side of the spacer 61. One or more protruding engagement members 66 is/are formed at the lower side of spacer 61, for engagement with a support structure.

Figs 7 to 9 illustrate mounting of the combined speaker and antenna element 50 of Fig. 5 to the spacer of Fig. 6, in a perspective view, though the leads and pads of the second portion 33 are left out for the sake of clarity. The first portion 31 carrying the conductive coating or layer is attached to the upper side 62 of spacer 61, preferably by use of an adhesive. The aperture 32 is oriented over the recess 63, and the film is pressed to the upper surface 62 such that it follows the curved shape of upper surface 62. In an alternative embodiment, wall 64 may be straight, like walls 65, but in that case there will be an edge where wall 64 meets upper surface 62. Such an embodiment may be employed if the flexible film allows sharp folding about an edge.

As is evident from Fig. 8, a lowermost portion 81 of the flexible film will extend outside spacer 61 when the film is attached thereto. This lowermost portion 81 preferably includes a lower part of first portion 31, and a proximal part of second portion 33 including proximal connection pads 36,37. Furthermore, second portion 33 preferably extends from this lowermost portion 81.

Fig. 9 illustrates how speaker 41 has been placed in the recess 63, by use of suitable attachment means. When positioning speaker 41 under the first portion 31 of the film, the second portion 33 is bent such that a front side of speaker 41 faces

the first portion 31, as is illustrated in Fig. 9. As a result in accordance with the invention, the spacing between two cooperating antenna elements is not only used for providing sufficient bandwidth to the antenna, but also for housing the speaker 41, thereby also providing an acoustic resonance cavity for speaker 41. In Fig. 8, as well as in Figs 3 and 5, it has been illustrated that the elongated second portion 33 is not entirely straight, although it may be. Instead, second portion 33 has at least one bend in the plane of the film, in the rested state of the film. The purpose thereof is to suitably orient the elongated second portion 33 when it is bent under a side edge of the first portion 31, such that speaker 41 is positioned at the aperture 32.

10 Figs 10 and 11 illustrates how the assembled device of Fig. 8 is attached to a support structure 100, for which only a top end is shown. Support structure 100 is preferably a Printed Circuit Board (PCB) carried in a chassis or housing of a radio communication terminal. The PCB 100 supports the electronics of terminal, though not shown in these drawings.

15 In Fig. 10 the support structure 100 is illustrated separate from the assembled spacer and flexible film. At 101 a cooperating antenna element is indicated by a dash-dotted line. Antenna element 101 cooperates, as previously mentioned, in a manner well known to the skilled person, with the antenna element constituted by the first conductive portion 31. Thanks to spacer 61, antenna element 101 and first portion 31 of the film will be arranged at a certain distance from each other. Antenna element 101 may be a ground plane to an active antenna element provided by first portion 31. However, in a preferred embodiment antenna element 101 is an active part of the antenna, having a suitable pattern in a plane of the support structure such that resonance is established for predetermined radio frequencies. In this preferred embodiment, first portion 31 of the flexible film provides the ground plane for the antenna.

25 One or more recessed engagement members 102 is/are formed in the support structure, for engagement with the protruding engagement members 66 at the lower side of spacer 61. Engagement of spacer 61 to support structure 100 may be achieved by a self-locking snap lock.

A conductive connection area 103,104 is further illustrated by dashed lines in

Fig. 10, devised for connection with the lowermost portion 81 of the flexible film. Preferably, the conductive first portion 31 of the flexible film is connected at lowermost portion 81 to a first section 103 of said connection area by hot bar soldering. This way connection between support structure 100 and first portion 31 is
5 created along substantially the entire width of first portion 31. In a preferred embodiment, an auxiliary ground plane (not shown) is provided in the support structure 100, in an intermediate layer or on a surface thereof, which auxiliary ground plane is connected to the ground plane of first portion 31 at connection area section 103. This way, and particularly due to the wide connection at connection
10 area 103, a large and continuous ground plane is provided, which will be beneficial to the performance of the antenna. The auxiliary ground plane may extend a limited portion of the length of the support structure, but preferably substantially all the way to a an end side of the support structure 100, opposite the illustrated top end. A second section 104, electrically separate from first section 103, of the connection
15 area is provided for connection with the proximal connection pad 36, or separate connection to proximal connection pads 36,37 if there are plural leads 34, 35, of second portion 33. The entire lowermost portion 81 is preferably attached to the designated sections 103,104 of said connection area in a single hot bar soldering action.

20 Fig. 11 illustrates the device according to Fig. 9 when assembled to the support structure 100, in accordance with the arrows in Fig. 10.

Fig. 12 shows a top view of the assembled device according to Fig. 11. The conductive first portion 31 of the flexible film extends into lowermost portion 81, at which it is connected to the designated section 103 of the connection area on the
25 support structure 100, and preferably the auxiliary ground plane. The second portion 33 of the flexible film is bent and folded such that speaker 41, attached to the outer end 40 of second portion 33, is placed behind aperture 32. At said second section 104 of connection area, proximal connection pads 36,37 are connected to respective connectors 126,127. These connectors 126,127 are, in turn, connected to speaker
30 control circuitry 120 arranged on said support structure, devised to provide speaker signals to speaker 41.

The present invention brings about several advantages, thanks to the inventive idea to mount the speaker inside the antenna cavity, where one antenna element and the speaker are carried by a common structure provided by a flexible film.

5 First of all, the invention brings about space savings. A terminal or housing, implementing the invention, may be designed with a thickness basically defined by the distance between the flexible film and the support structure, e.g. a PCB, since the thickness contribution from the speaker has been eliminated. Furthermore, even though the antenna cavity 21 has been partly occupied by the speaker, experimental
10 laboratory tests on this design have surprisingly shown that the presence of the speaker will not result in reduced antenna performance if tuned properly. The use of hot bar soldering will not lead to bulging solder pads, which also contributes to saving space.

Second, a single component having plural functions, i.e. providing an
15 antenna element, leads to a speaker, and pads for connection both to the speaker and speaker control circuitry, provides a logistics advantage since fewer details are involved in the assembly.

By the proposed design the amount of metal in the vicinity of the antenna is minimised, since no extra contacts or wires to the speaker are needed, and very little
20 metal is included in the thin and narrow leads formed on the film. This means less negative impact on the performance of the antenna.

Finally, the hot bar soldering along substantially the entire width of the antenna element provided by first portion 31 on the flexible film, ensures a large continuous ground plane with increased antenna performance as a consequence.

25 The foregoing has described the principles, preferred embodiments and modes of operation of the present invention. However, the above described embodiments should be regarded as illustrative rather than restrictive, and it should be appreciated that variations may be made in those embodiments by those skilled in the arts without departing from the scope of the present invention as defined in
30 the appended claims.

Claims

1. Integrated speaker and antenna element carrier for a communication terminal,
characterised by a sheet of a flexible film having a conductive first portion (31)
5 forming an antenna element, and an elongated second portion (33) carrying a
conductive lead (34) extending from adjacent (36) to said first portion to a speaker
connection pad (38) at an outer end (40) of said elongated second portion.
2. The integrated speaker and antenna element carrier as recited in claim 1,
10 **characterised in** that said second portion carries a pair of conductive leads (34,35)
from adjacent said first portion to respective speaker connection pads (38,39).
3. The integrated speaker and antenna element carrier as recited in claim 1,
characterised in that said second portion carries at least one conductive lead which
15 is electrically insulated from said first portion.
4. The integrated speaker and antenna element carrier as recited in claim 1,
characterised in that said first conductive portion and said lead are shaped by
material removal from a conductive layer on the film.
20
5. The integrated speaker and antenna element carrier as recited in claim 4,
characterised in that said first conductive portion and said lead are shaped by
etching of said conductive layer.
- 25 6. The integrated speaker and antenna element carrier as recited in claim 1,
characterised in that said second portion is devised to carry a speaker (41)
connected to said speaker connection pad, wherein said second elongated portion is
bendable such that said speaker is positioned at an aperture (32) in said first portion.
- 30 7. The integrated speaker and antenna element carrier as recited in claim 1,
characterised in that said conductive lead extends from a connection pad (36,37)

arranged adjacent to said first portion at a straight edge of said flexible film.

8. The integrated speaker and antenna element carrier as recited in claim 1,
characterised in that said conductive first portion is a ground plane of an antenna
5 for a radio communication terminal.

9. The integrated speaker and antenna element carrier as recited in claim 1,
characterised in that said conductive first portion is a an antenna element of an
antenna for a radio communication terminal, and has a pattern adapted to provide
10 resonance at predetermined radio frequencies.

10. Combined speaker and antenna arrangement for a communication terminal,
comprising a support structure (100) carrying a first antenna element (101), and a
second antenna element (31) arranged at a predetermined distance from said first
15 antenna element, **characterised in** that said second antenna element is a conductive
first portion of a sheet of flexible film, wherein an elongated second portion (33) of
said flexible film, carrying a conductive lead (34), extends from adjacent (36) to
said first portion to a speaker (41) connected to an outer end (40) of said elongated
second portion.

20

11. The combined speaker and antenna arrangement as recited in claim 10,
characterised in that said second elongated portion is bent such that said speaker is
positioned between said film and said support structure, adjacent to an aperture (32)
in said first portion.

25

12. The combined speaker and antenna arrangement as recited in claim 10,
characterised in that said flexible film is attached to said support structure such
that said conductive first portion is electrically connected (81,103) to a ground plane
of said support structure.

30

13. The combined speaker and antenna arrangement as recited in claim 12,

characterised in that said flexible film is attached at a side edge (81) thereof, to said support structure, at which second side edge a connector pad (126,127) to said conductive lead is arranged.

- 5 14. The combined speaker and antenna arrangement as recited in claim 13, **characterised in** that said connector pad is connected, at said side edge, to speaker control circuitry (120) arranged on said support structure.

15. The combined speaker and antenna arrangement as recited in claim 10,
10 **characterised in** that said flexible film is bar soldered at a straight edge (81) to said support structure, at which straight edge said conductive first portion is electrically connected (103) to a ground plane of said support structure, and a connector pad (104) to said conductive lead is connected to speaker control circuitry (120) arranged on said support structure.

15

16. The combined speaker and antenna arrangement as recited in any of the previous claims 10 - 15 , **characterised in** that an insulating spacer (61) is arranged intermediate said support structure and said flexible film, defining said predetermined distance between said first and second antenna elements.

20



17. The combined speaker and antenna arrangement as recited in claim 11 and 16, **characterised in** that said spacer comprises speaker attachment means (63), devised to secure said speaker adjacent to said aperture.

- 25 18. The combined speaker and antenna arrangement as recited in claim 16, **characterised in** that said flexible film is attached to said spacer with an adhesive.

19. The combined speaker and antenna arrangement as recited in claim 16, **characterised in** that said spacer is attached to said support structure by
30 cooperating engagement members (66,102).

20. The combined speaker and antenna arrangement as recited in claim 19, **characterised in** that said spacer has a protruding member (66) engaging with a recess (102) in said support structure.
- 5 21. The combined speaker and antenna arrangement as recited in any of the previous claims 16 -20, **characterised in** that said support structure is a printed circuit board of a radio communication terminal.
22. Radio communication terminal, comprising a combined speaker and antenna
10 arrangement as recited in any of the previous claims 16 -21.
23. Method for producing an integrated speaker and antenna element carrier for a communication terminal, **characterised by** the steps of:
- providing a flexible film of an insulating material;
 - 15 - coating said film with a conductive material;
 - removing selected portions of the conductive material from the film, to define a first conductive surface portion, and a lead, insulated from said first portion and extending away from adjacent to said first portion; and
 - cutting the film such that an elongated second portion thereof, carrying said lead,
20 is shaped.
24. The method as recited in claim 23, **characterised by** said removing of selected portions of the conductive material including the step of etching.
- 25 25. The method as recited in claim 23, **characterised by** defining, in said step of removing of selected portions of the conductive material, a pair of separate leads, insulated from said first portion and extending away from adjacent to said first portion.

1/5

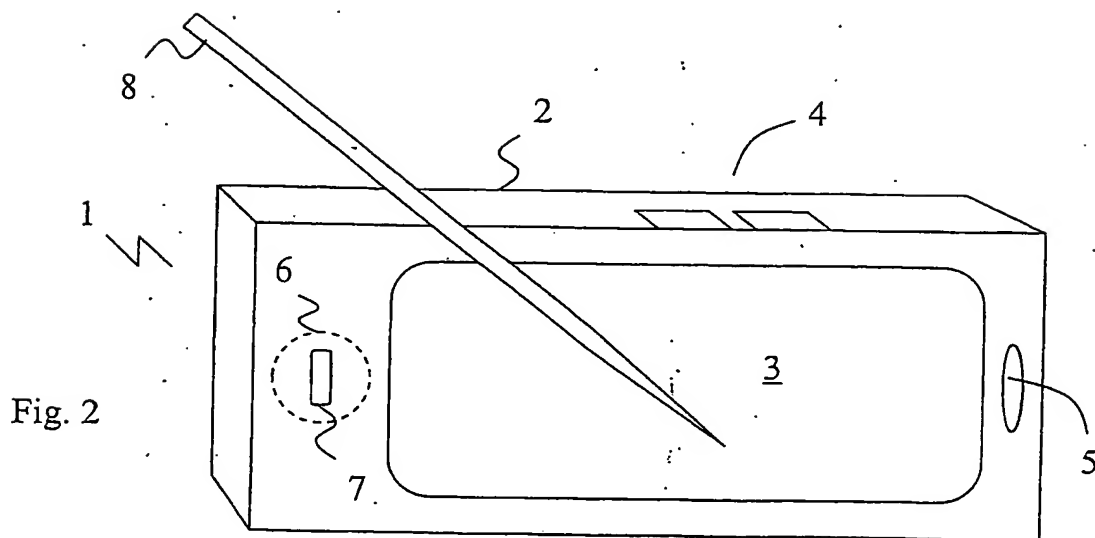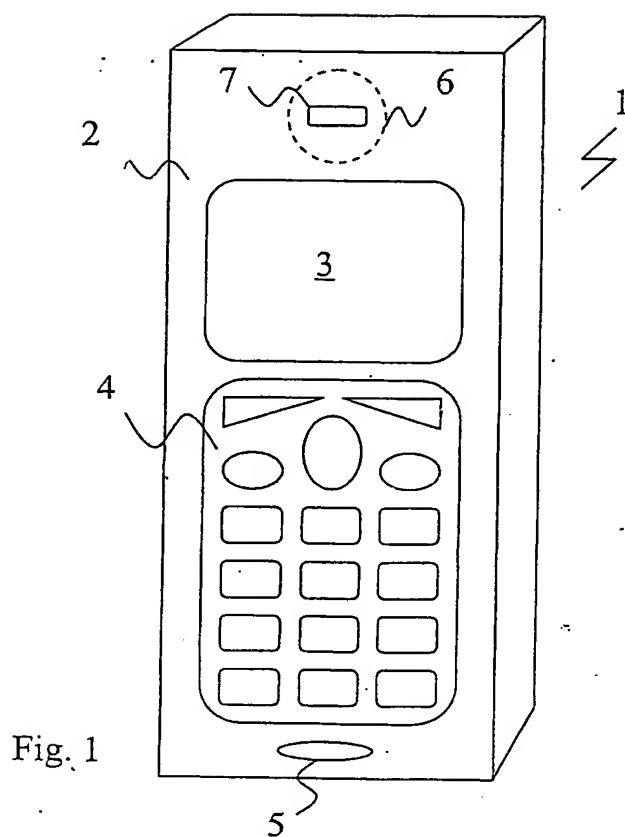

2/5

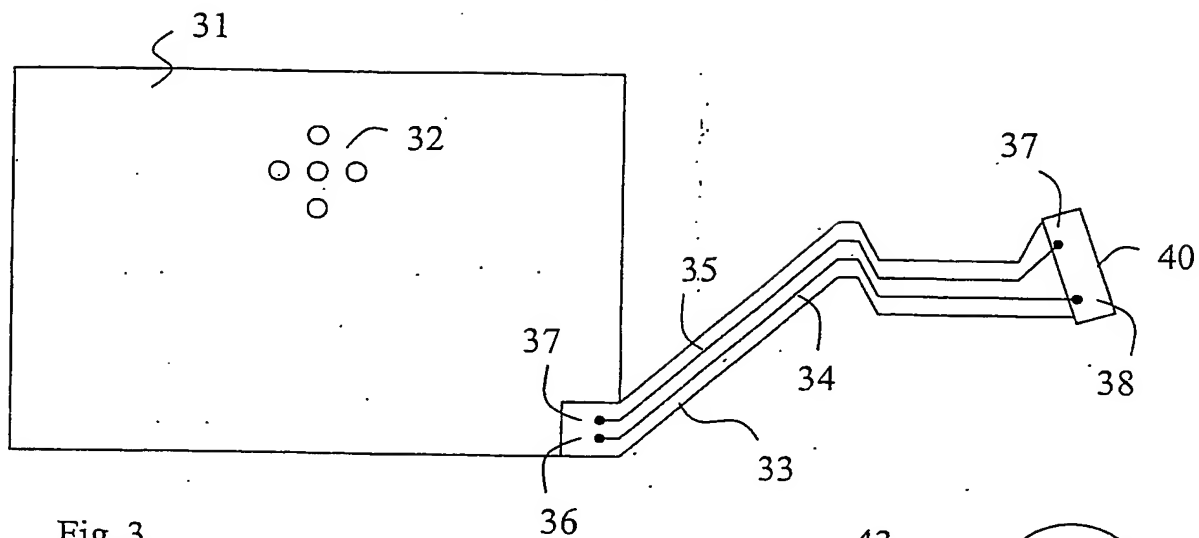


Fig. 3

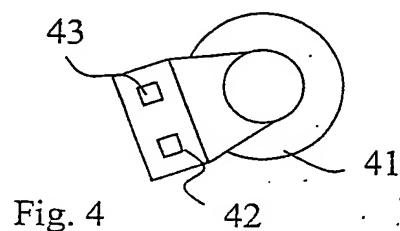


Fig. 4

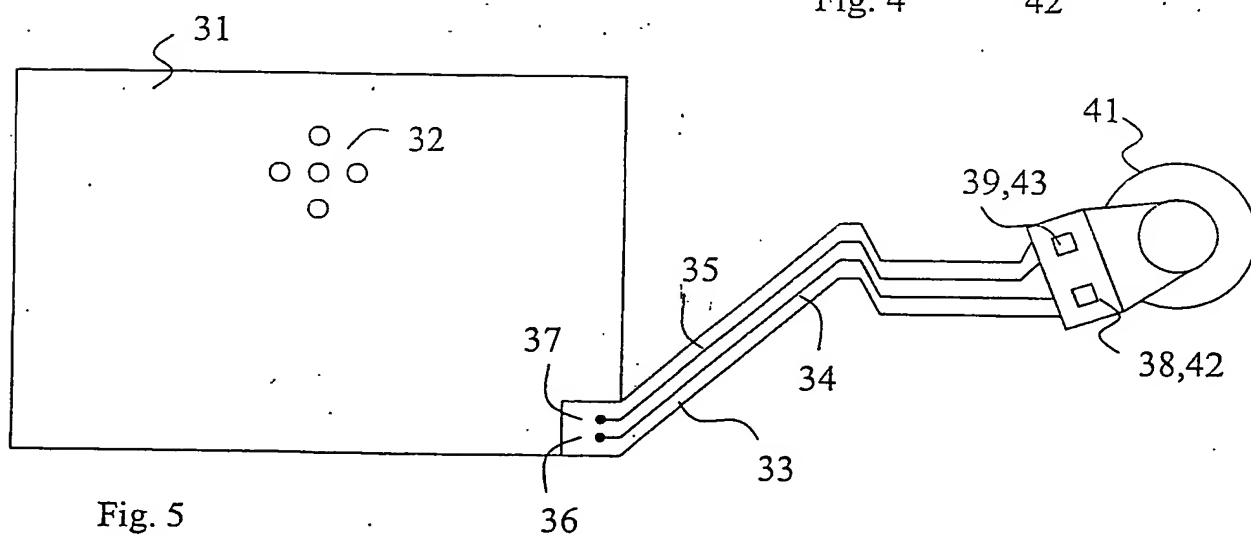


Fig. 5

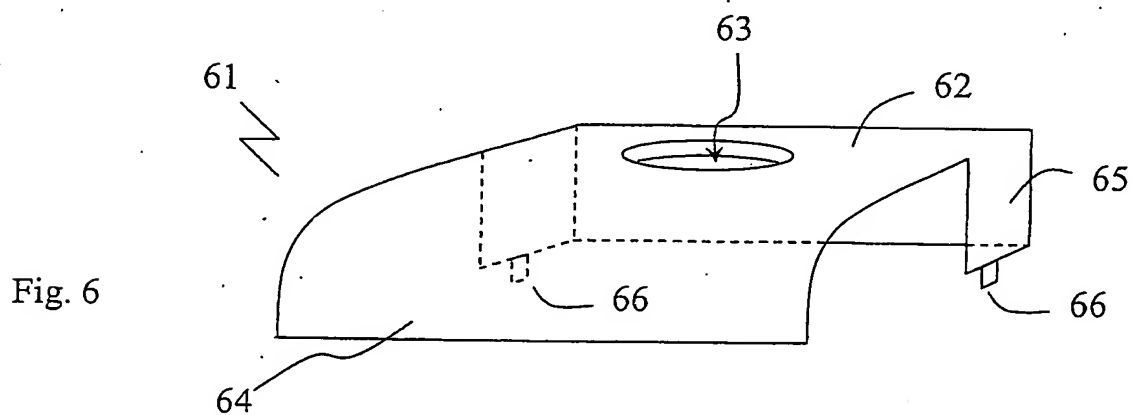


Fig. 6

3/5

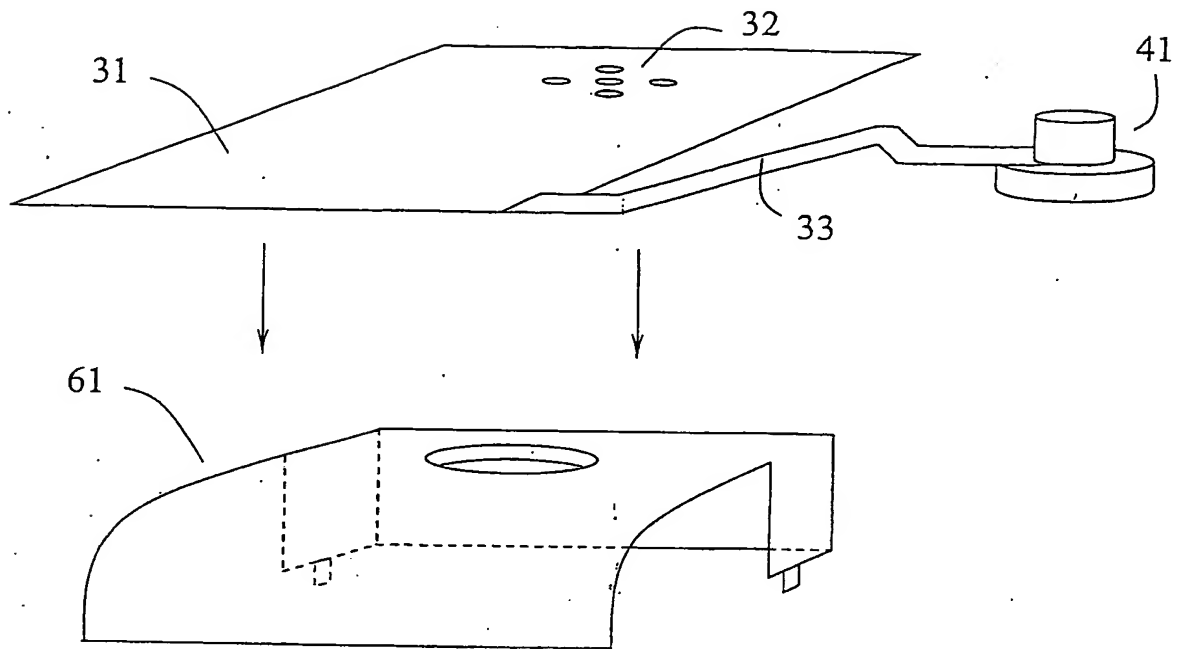


Fig. 7

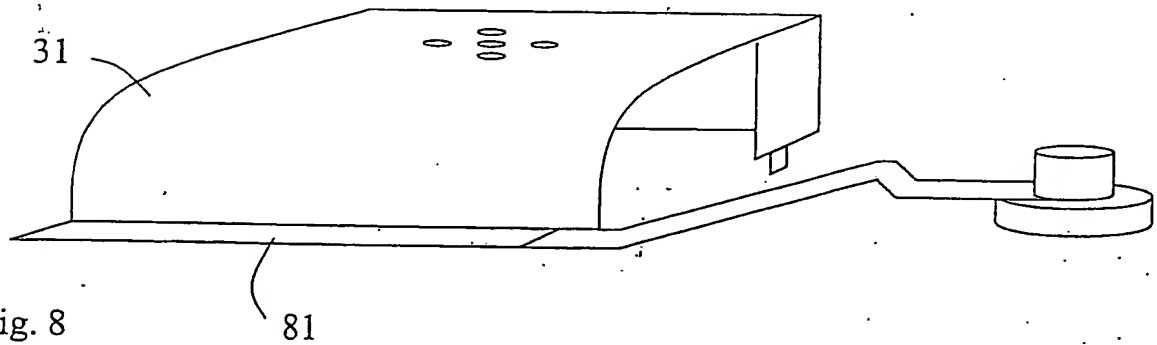


Fig. 8

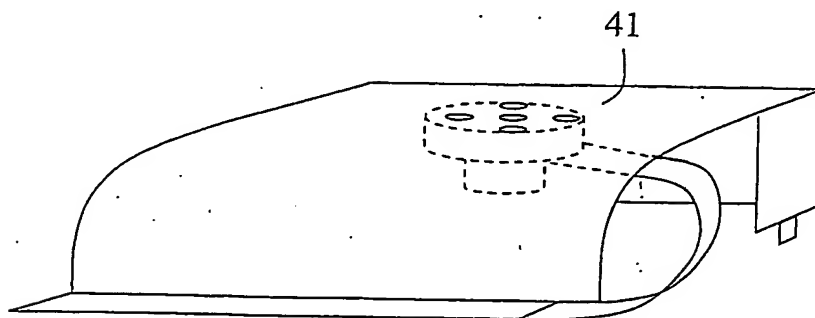


Fig. 9

4/5

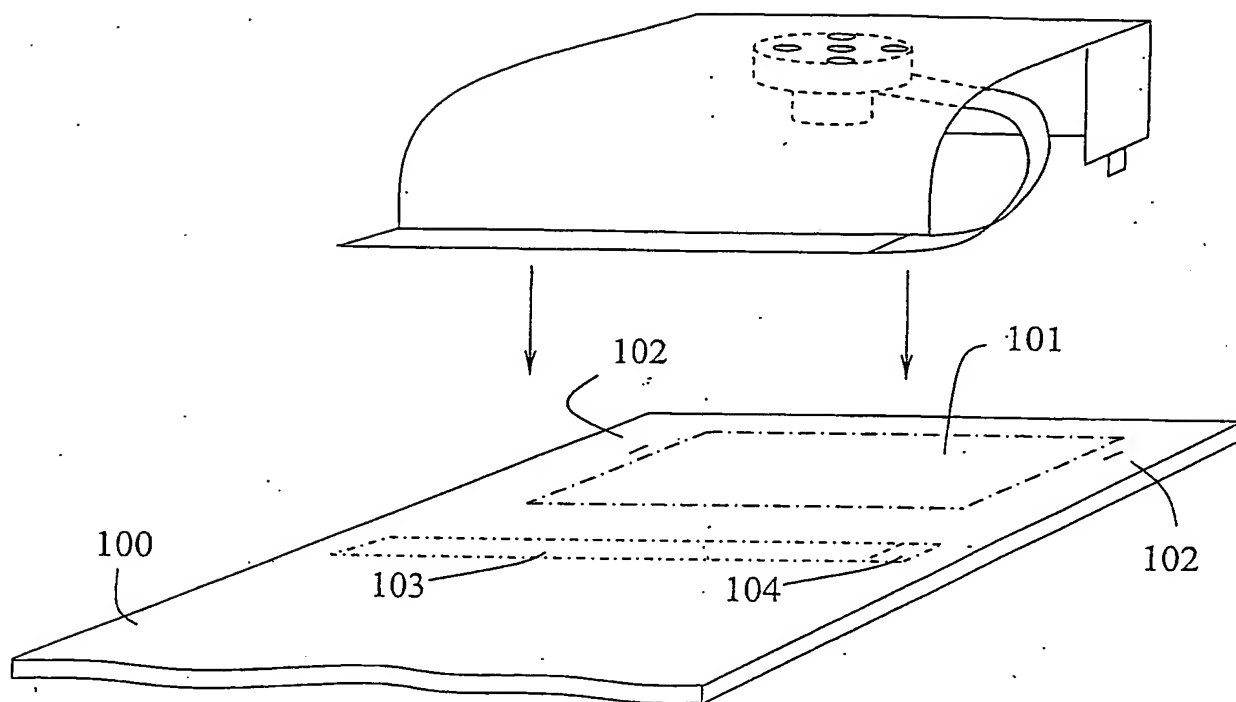


Fig. 10

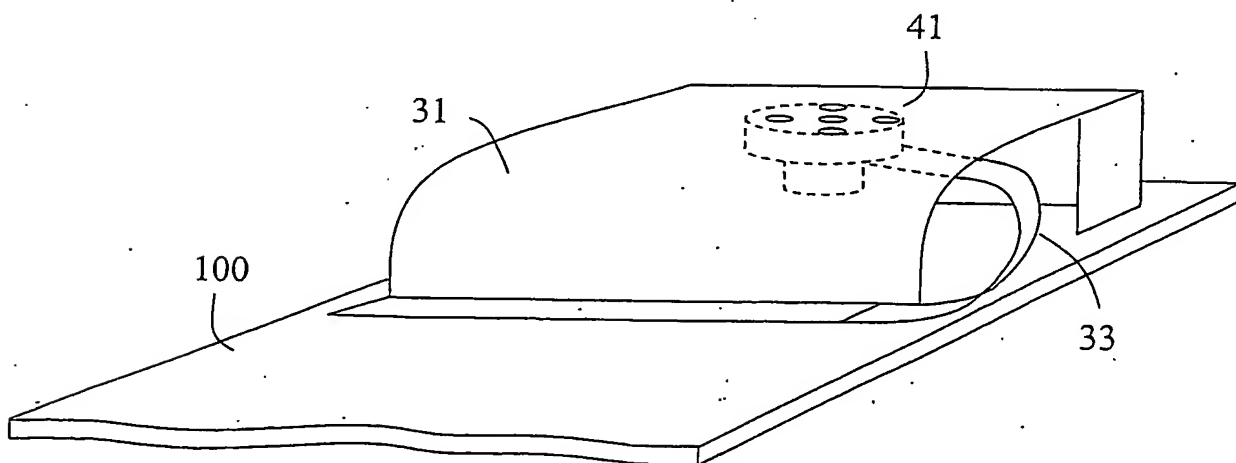


Fig. 11

5/5

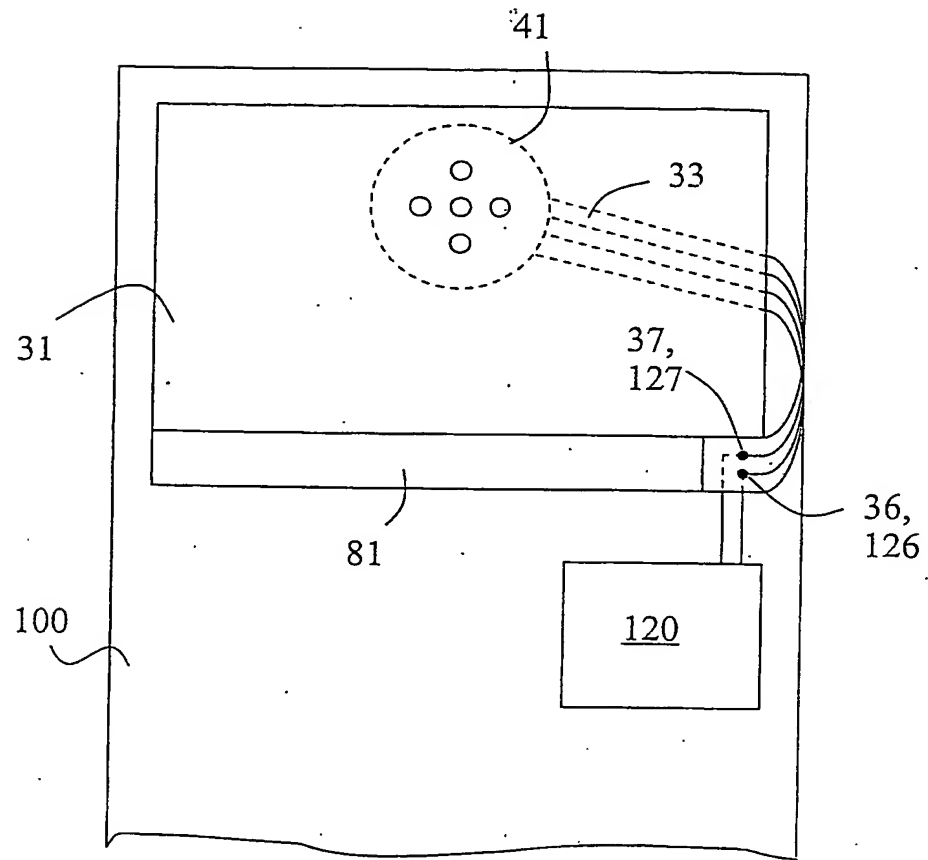


Fig. 12

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2004/001003

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01Q1/24 H01Q9/04 H01Q1/38 H04B1/38 H04M1/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01Q H04B H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 100 52 909 A (SIEMENS AG) 8 May 2002 (2002-05-08) abstract column 3, line 15 - column 4, line 16 column 4, line 43 - line 52 column 5, line 12 - line 38; figures 2,4,5	1-5,7-25
Y	US 6 031 505 A (QI YIHONG ET AL) 29 February 2000 (2000-02-29) column 4, line 25 - line 49; figure 2	1-5,7-25
A	EP 1 184 936 A (NOKIA MOBILE PHONES LTD) 6 March 2002 (2002-03-06) column 5, line 4 - line 33; figures 2-4	1-25
P,X	EP 1 317 116 A (SAGEM) 4 June 2003 (2003-06-04) abstract; figures 1-7	1,10,23
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

13 May 2004

Date of mailing of the international search report

25/05/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Angrabeit, F

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2004/001003

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	EP 1 294 051 A (CIT ALCATEL) 19 March 2003 (2003-03-19) abstract; figures 1-5 -----	1, 10, 23

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/001003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 10052909	A	08-05-2002	DE 10052909 A1	08-05-2002
			CN 1471789 T	28-01-2004
			WO 0235810 A1	02-05-2002
			EP 1329085 A1	23-07-2003
			US 2004036656 A1	26-02-2004
US 6031505	A	29-02-2000	AU 4595599 A	17-01-2000
			CA 2335973 A1	06-01-2000
			WO 0001028 A1	06-01-2000
			EP 1090438 A1	11-04-2001
EP 1184936	A	06-03-2002	FI 20001903 A	01-03-2002
			CN 1344043 A	10-04-2002
			EP 1184936 A1	06-03-2002
			JP 2002124811 A	26-04-2002
			US 2002047807 A1	25-04-2002
EP 1317116	A	04-06-2003	FR 2833128 A1	06-06-2003
			FR 2837036 A1	12-09-2003
			CN 1422096 A	04-06-2003
			EP 1317116 A1	04-06-2003
EP 1294051	A	19-03-2003	FR 2829651 A1	14-03-2003
			CN 1420636 A	28-05-2003
			EP 1294051 A1	19-03-2003
			JP 2003204594 A	18-07-2003
			US 2003068987 A1	10-04-2003